

# Stainless Steel MultiCartridge Filters

**SST**  
Series



Model: SST-4 to 20



Model: SST-1 to 3


## FEATURES OF THE SST

- 💧 Commercial, residential, school or farm use
- 💧 1/4" drain on sides
- 💧 304 stainless steel housing, also available in 316 stainless steel for Model: SST-4 to SST-20
- 💧 Brass head with 304 SS sump or 316 SS head with 304 SS sump for Model: SST-1 & SST-2
- 💧 Accept complete range of filter media
- 💧 Accept 9 3/4" cartridges
- 💧 Use as filtration for: silt, taste, odor or sediment

Model	Rated Capacity	* Max. Operating Pressure	Dirt/Rust Flow	Taste/Odor Flow	Dimension (Inch)		No. of Cartridges	Pipe Size (NPT) (Inch)			Shipping Weight (lbs)
	(GPM)	(PSIG)	(GPM)	(GPM)	Height	O.D.		(10")	In/Out	Drain	
** SST-1	8	300	N/A	N/A	N/A	N/A	1	3/8, 1/2, 3/4 & 1	1/2	N/A	N/A
** SST-2	16	300	N/A	N/A	N/A	N/A	2	3/8, 1/2, 3/4 & 1	1/2	N/A	N/A
** SST-3	24	125	N/A	N/A	N/A	N/A	3	1/2, 3/4 & 1	1/2	N/A	N/A
SST-4	28	150	28	16	19 1/4"	10"	4	2	1/2	1/4	25
SST-5	35	150	35	20	19 1/4"	10"	5	2	1/2	1/4	30
SST-8	56	150	56	32	29"	10"	8	2	1/2	1/4	33
SST-10	70	150	70	40	29"	10"	10	2	1/2	1/4	35
SST-12	84	150	84	48	39"	10"	12	2	1/2	1/4	41
SST-15	105	150	105	60	39"	10"	15	2	1/2	1/4	43
SST-16	112	150	112	64	49"	10"	16	2	1/2	1/4	48
SST-20	140	150	140	80	49"	10"	20	2	1/2	1/4	51

\* Flow shown are based on a maximum flow of 8GPM per sediment cartridge or are limited by the connection size.

\*\* Flow shown are for SST-1 with 1/2", 3/4" & 1" connections and for SST-2 & SST-3 with 3/4" & 1" connections.

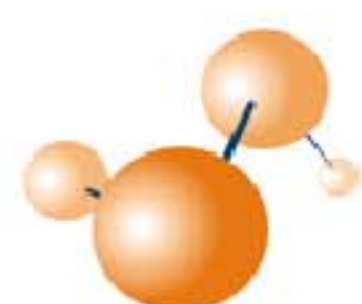

**EXTOL**  
Hydro Technologies